

BESPOKEN ARTICLES

Barberi® *OEM/project*

A company department totally dedicated to projects and customized solutions




W28.020.H1

4-ways vertical mixing valve with running nuts. Connection distance: 105mm



Max working temperature 110 °C



cod.	size	KV	P [bar]	NPS	NPC	€
W28 020 00M H01	G 1" - G 1/2"	5,5	10	1	16	

615.1

By-pass differential valve with running nuts - range 0,2-2,5m. With flat gaskets. Connection distance 55mm



Max working temperature 95 °C
Connection distance 55mm


cod.	size	P [bar]	NPC	€
615 015 000 01	G3/4" F	10	40	

W28.020.H2

4-ways vertical mixing valve with running nuts. Connection distance: 90mm



Max working temperature 110 °C



cod.	size	KV	P [bar]	NPS	NPC	€
W28 020 00M H02	G 1" - G 1/2"	5,5	10	1	16	

616.1

By-pass differential valve with running nuts - range 2-6,5m. With flat gaskets. Connection distance 55mm



Max working temperature 95 °C
Connection distance 55mm


cod.	size	P [bar]	NPC	€
616 015 000 1	G3/4" F	10	40	

W28.022

4-ways vertical mixing valve - compression ends



Max working temperature 110 °C



cod.	size	KV	P [bar]	NPS	NPC	€
W28 022 00M H	22 mm	5,5	10	1	16	

009

Compact check valve F.F.



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
009 015 000	G1/2"	16	1	300	

193

Check valve with running nut for pump connection



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
193 020 000 ●	G 3/4" - G 1"1/2	16	-	80	
193 020 000 W ●	R 3/4" - G 1"1/2	16	-	80	
193 025 000 ●	G 1" - G 1"1/2	16	-	80	
193 025 000 W ●	R 1" - G 1"1/2	16	-	80	

037

Check valve with water meter connection nut - M.F.



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
037 015 000	G1/2" - G3/4"	16	-	200	

189

Check valve with water meter connection nut - F.M.



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
189 015 000	G1/2" - G3/4"	16	-	200	

017

Check valve - M.M. with double drain



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
017 150 00	G3/4"	16	12	96	

190

Double check valve with drain - CR (DZR) brass



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
190 015 000	G1/2"	16	-	100	
190 020 000	G3/4"	16	-	50	

164

Double check valve with drain and compression ends - CR (DZR) brass



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
164 A15 000	15mm	16	-	45	
164 A22 000	22mm	16	-	50	

P	Max working pressure
N°P/S	Pieces per box
N°P/C	Pieces per carton



●	Article on request
---	--------------------

P	Max working pressure
N°P/S	Pieces per box
N°P/C	Pieces per carton



●	Article on request
---	--------------------

Z51
Square check valve with drain and running nuts - plastic handle



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
Z51 025 000	G 1" - G 1" - G 1/2"	16	10	60	

100
Swing check valve M.M. - rubber tightness



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
100 050 000 ●	G2"	16	-	16	
100 065 000 ●	G2"1/2	16	-	12	

051V
Y filter with compression ends - viton tightness



Max working temperature 150 °C

cod.	size	type	P [bar]	NPS	NPC	€
051 015 000 V	15mm	mesh type C	16	20	120	
051 022 000 V	22mm	mesh type C	16	14	56	
051 028 000 V	28mm	mesh type C	16	10	40	

P75
Y filter with male connection and running nut - M.F. (brass DZR)



Max working temperature 95 °C
(see mesh type at the chapter start)

cod.	size	type	P [bar]	NPS	NPC	€
P75 A20 000 ●	G3/4"	mesh type A	16	14	84	

Z39R
Square check valve with drain and running nut



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
Z39 020 000 R	G 1" - Rp 3/4" - G 1/2"	16	10	60	

102
Swing check valve M.M. - metal tightness



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
102 050 000 ●	G2"	16	-	16	
102 065 000 ●	G2"1/2	16	-	12	

052A
Y filter with compression end and seal on the thread - DZR brass



Max working temperature 95 °C

cod.	size	type	P [bar]	NPS	NPC	€
052 A22 000	22mm - G3/4"	mesh type C	16	14	56	

Y98
90° impurity collecting filter with drain G1/4"



Max working temperature 95 °C
(see mesh type at the chapter start)

cod.	size	type	P [bar]	NPS	NPC	€
Y98 020 000	G 3/4" - Rp 3/4"	mesh type A	16	-	-	

Z39
Square check valve with drain



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
Z39 020 000 ●	G 1" - Rp 3/4" - G 1/2"	16	10	60	
Z39 025 000 ●	G 1" - Rp 1" - G 1/2"	16	10	60	

041
Foot valve with interchangeable stainless steel filter - brass filter connection



Max working temperature 95 °C

cod.	size	type	P [bar]	NPS	NPC	€
041 025 000	G1"	mesh type A	10	10	60	
041 032 000	G1"1/4	mesh type A	8	5	45	
041 040 000	G1"1/2	mesh type A	8	4	24	

053
Y filter - M.M.



Max working temperature 95 °C

cod.	size	type	P [bar]	NPS	NPC	€
053 015 000	G1/2"	mesh type A	16	20	80	
053 020 000	G3/4"	mesh type A	16	20	80	

P Max working pressure
N°P/S Pieces per box
N°P/C Pieces per carton



● Article on request

P Max working pressure
N°P/S Pieces per box
N°P/C Pieces per carton



● Article on request

Y82

Ball valve with running nut and male connection



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
Y82 015 000 ●	G3/4" F - G1/2" M	16	-	50	
Y82 020 000 ●	G3/4" F - G3/4" M	16	-	50	
Y82 025 000 ●	G1" F - G1" M	16	-	40	

208

Bent ball cock chrome plated with stainless steel connection - reduced bore



Max working temperature 95 °C
Metal handle G 3/4"

cod.	size	P [bar]	NPS	NPC	€
208 015 C00	G1/2"	10	25	200	
208 020 C00	G3/4"	10	12	96	

206

Bent ball cock - chrome plated - stainless steel connection



Max working temperature 95 °C
Nylon handle G 3/8"

cod.	size	P [bar]	NPS	NPC	€
206 010 C00	G3/8"	10	25	200	
206 010 C00	G1/2"	10	10	80	

390

"MOON" monobloc (ball valve+check valve)



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
390 015 000 FLO	DN15 - G1/2"	16	-	50	

207

Bent ball cock - chrome plated, reduced bore



Max working temperature 95 °C
Metal handle G 3/4"

cod.	size	P [bar]	NPS	NPC	€
207 015 C00	G1/2"	10	20	160	
207 020 C00	G3/4"	10	10	80	

W97

Bent ball cock chrome plated - expansion connection (silicone for food) - recommended for holes without thread



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
W97 010 C00	DN8	10	25	200	

Z82

Drain cock with adjustable plastic hose connection (Hose diameter less than 21mm)



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
Z82 020 000 X	G3/4"	10	25	100	

390S

"MOON" monobloc (ball valve+check valve) with side drains and gauge connection



Max working temperature 95 °C

cod.	size	P [bar]	NPS	NPC	€
390 015 005 FLO	DN15 - G1/2"	16	-	50	

P	Max working pressure
N°P/S	Pieces per box
N°P/C	Pieces per carton



●	Article on request
---	--------------------

P	Max working pressure
N°P/S	Pieces per box
N°P/C	Pieces per carton



●	Article on request
---	--------------------

700SF

“SUN” monobloc (ball valve+filter) with side drains and gauge connection - butterfly handle (code“XXX XXX NXX XXX” nickel plated)

cod.	size	handle colour	P [bar]	NPS	NPC	€
<i>Max working temperature</i> 95 °C						
700 015 OBS FAO	DN15 - G1/2"	red	20	-	50	
700 015 NBS FAO	DN15 - G1/2"	red	20	-	50	
700 015 OBS FBO	DN15 - G1/2"	blue	20	-	50	
700 015 NBS FBO	DN15 - G1/2"	blue	20	-	50	
700 020 OBS FAO	DN20 - G3/4"	red	20	-	25	
700 020 NBS FAO	DN20 - G3/4"	red	20	-	25	
700 020 OBS FBO	DN20 - G3/4"	blue	20	-	25	
700 020 NBS FBO	DN20 - G3/4"	blue	20	-	25	
700 025 OBS FAO	DN25 - G1"	red	20	-	20	
700 025 NBS FAO	DN25 - G1"	red	20	-	20	
700 025 OBS FBO	DN25 - G1"	blue	20	-	20	
700 025 NBS FBO	DN25 - G1"	blue	20	-	20	



720SF

“MAGNUM” monobloc (ball valve+filter +check valve) with side drains and gauge connection - butterfly handle (code“XXX XXX NXX XXX” nickel plated)

cod.	size	handle colour	P [bar]	NPS	NPC	€
<i>Max working temperature</i> 95 °C						
720 015 OBS FAO	DN15 - G1/2"	red	16	-	50	
720 015 NBS FAO	DN15 - G1/2"	red	16	-	50	
720 015 OBS FBO	DN15 - G1/2"	blue	16	-	50	
720 015 NBS FBO	DN15 - G1/2"	blue	16	-	50	
720 020 OBS FAO	DN20 - G3/4"	red	16	-	25	
720 020 NBS FAO	DN20 - G3/4"	red	16	-	25	
720 020 OBS FBO	DN20 - G3/4"	blue	16	-	25	
720 020 NBS FBO	DN20 - G3/4"	blue	16	-	25	
720 025 OBS FAO	DN25 - G1"	red	16	-	20	
720 025 NBS FAO	DN25 - G1"	red	16	-	20	
720 025 OBS FBO	DN25 - G1"	blue	16	-	20	
720 025 NBS FBO	DN25 - G1"	blue	16	-	20	




350SM

Monobloc (ball valve+filter +check valve) with side drains and gauge connection - butterfly handle (code“XXX XXX NXX XXX” nickel plated)

cod.	size	handle colour	P [bar]	NPS	NPC	€
<i>Max working temperature</i> 95 °C						
350 015 00S 00M	DN15 - G1/2"	red	16	-	50	
350 015 N0S 00M	DN15 - G1/2"	red	16	-	50	



Technical data sheets available on the web site www.barberi.it

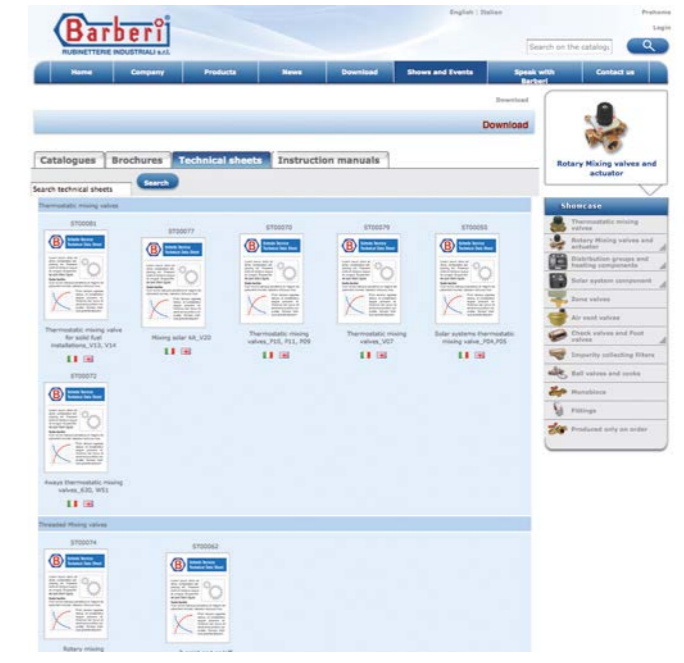

General information
barberi@barberi.it

Sales office Italy
commerciale-italia@barberi.it

Sales office Foreign Markets
commerciale-estero@barberi.it

Administrative office
amministrativo@barberi.it

Technical office
tecnico@barberi.it

Assistance
assistenza@barberi.it

Barberi® Rubinetterie Industriali s.r.l.
13018 VALDUGGIA (VC) ITALY
Via Monte Fenara, 7
Tel. 0039 0163 48.284
Fax 0039 0163 48.287

P	Max working pressure
N°P/S	Pieces per box
N°P/C	Pieces per carton



●	Article on request
---	--------------------



Barberi® reserves the right to modify the present information without notice; **Barberi®** is not liable for injuries or damages which could occur to things, people or materials due to unsuitable and different applications, other than the suggested, of its articles